

MULP275 Series

275 Watts

- Ultra low profile 0.75" in 5 x 3" footprint
- Latest medical approvals IEC60601-1 3rd Ed and IEC60601-1-2 2014
- 160W Convection cooled / 275W Fan cooled
- Cover kits available
- EN55011 Level B conducted & radiated
- Screw terminal and power good, AC power fail output signal option
- 3 Year warranty



Dimensions:

5 x 3 x 0.75" (127 x 76.2 x 19.05mm)

The MULP275 series of ultra low profile, open frame AC-DC power modules offer 160W convection cooled and 275W fan cooled in a 5" x 3" package. The units are fully featured including screw terminal, output signal (power good, AC power fail) and cover options⁽⁶⁾. They are chassis mount, low noise, low no load (<0.5W), with a wide operating temperature of -40 to 70°C, in a range of voltages from 12V to 58V and all come with a FIDUS 3 year warranty.

Models & Ratings

INSTALLATION ADVICE PG5

Model Number ⁽¹⁾	Output Power ⁽²⁾	Output voltage ⁽³⁾	Output Current			Efficiency ⁽⁴⁾
			Convection at 50° C	Convection at 40° C	300LFM Fan cooled	
MULP275- <u>1</u> 312	275W	12V	12.50A	13.33A	22.92A	88%
MULP275- <u>1</u> 315	275W	15V	10.00A	10.66A	18.33A	88%
MULP275- <u>1</u> 324	275W	24V	6.25A	6.67A	11.46A	90%
MULP275- <u>1</u> 330	275W	30V	5.00A	5.33A	9.17A	90%
MULP275- <u>1</u> 348	275W	48V	3.12A	3.33A	5.73A	92%

Notes

1. For screw terminal version replace 3 above for 0. Example 'MULP275-1012' for power good and AC power fail version change 1 above for 0. Example 'MULP275-0012'
2. Combined output power is main un DC output + fan output (12V 0.5A)
3. 58V unit also available, please contact sales
4. At 100% load, 230VAC
5. Cover kit available ULP275-CK / ULP275CKP for PF/AC fail version * cover kit derates unit to 70%
6. Loom kits available. See 'Installation Advice' on pg5
7. For class II versions please contact sales

Key specifications

Parameter	Minimum	Typical	Maximum	Units	Notes & Conditions
AC Input range	80		264	VAC	Derate from 100% at 100VAC to 72% for forced air and 69% for convection cooling at 80VAC
Operating temperature	-40		70	°C	See derating curve p3. Ripple can be 10% or more between -40 and 0°C, start-up guaranteed.
Efficiency	See ratings table above				
Dimensions	5 x 3 x 0.75" (127 x 76.2 x 19.05mm)				
EMC	EN55011 Level B conducted and radiated EN61000-3 and EN61000-4, harmonics, flicker, Surge, EFT, ESD, conducted and radiated.				
Safety	EN/IEC60601-1 3rd Ed, ANSI/AAMI ES60601-1, CSA22.2 No 60601-1, CE, Class 1 SELV				

MULP275 Series

Input

Parameter	Minimum	Typical	Maximum	Units	Notes & Conditions
Input voltage	80		264	VAC	Derate from 100% at 100VAC to 72% for forced air and 69% for convection cooling at 80VAC
Input frequency	47		63	Hz	
Power factor	0.95				EN61000-3-2 class D compliant, at full load
Input current (rms)			2.6	A	At 115VAC
			1.3		At 230VAC
Inrush current			25	A	115VAC cold start at 25°C
			45		230VAC cold start at 25°C
No load input power		<0.5 / 0.8		W	<0.8W for power good / AC power fail version

Output

Parameter	Minimum	Typical	Maximum	Units	Notes & Conditions
Output voltage	12		58	VDC	See Model & Ratings table
Output Voltage Adjust		±3		%	
Set point accuracy			±1	%	
Line regulation			±0.5	%	
Load regulation			±1	%	
Minimum load	0			%	
Transient response			4	%	25% step change 0.1A/uS slew 50% duty 50hz in <5ms
Ripple & Noise	1		2	%	All models measured with 0.1uF ceramic and 10uF electrolytic capacitor. 20 MHz bandwidth. At rated line and full load.2% for 15V and 24V models
Hold up time	8		16	mS	10mS at 275W, 16mS at 160W
Overload protection	110			%	
Short circuit protection					Trip and restart. Automatic recovery
Overvoltage protection	110		140	%	Latching, requires manual power reset.
Leakage current		300		uA	Not applicable for class II versions
Touch current			100	uA	


General

Parameter	Minimum	Typical	Maximum	Units	Notes & Conditions
Efficiency	Please see ratings table on page 1				
Isolation: Input to output	4000			VAC	
Input to ground	1500			VAC	
Output to ground	500		1500	VAC	1500 for BF and 500 for B type
Switching frequency	50		80	KHz	For power switching. PFC switching: 70-130KHz
Power density			24.44	W/in ³	
MTBF	>3.37			MHrs	As per Telcordia-SR332– issue 3
Weight			250	g	


Environmental

Parameter	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating temperature	-40		70	°C	Derate above 50°C at 2.5% per °C Please see derating curve on page 3
Storage temperature	-40		85	°C	
Cooling					Convection cooled / fan cooled 13CFM
Altitude	16000		40000	ft	16000ft operating 40000ft non operating
Humidity	5		95	% RH	Non condensing

Power Derating Curve

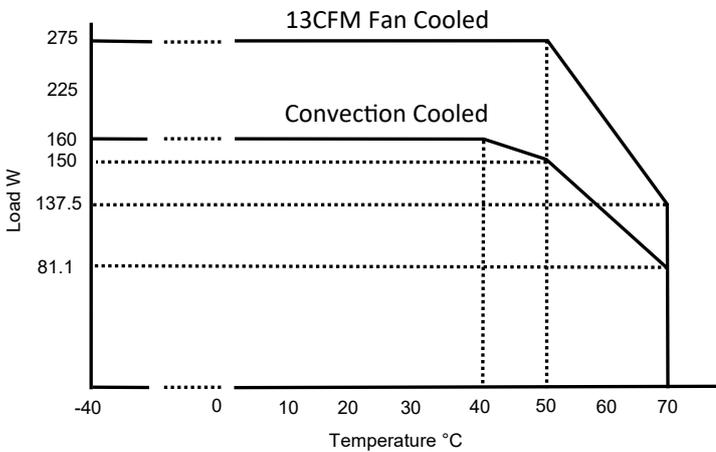

AC Input Derating Curve

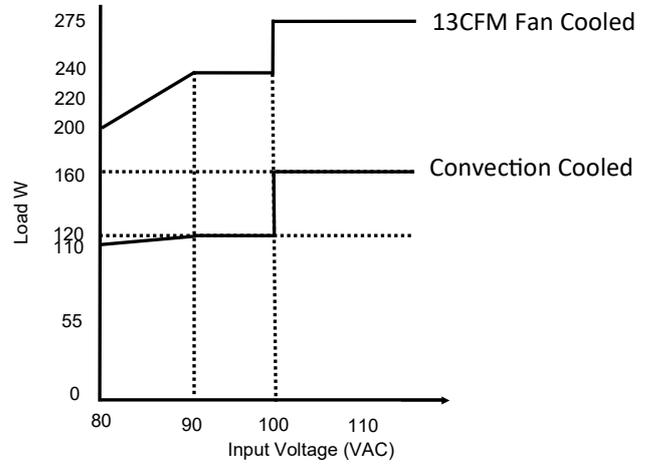

EMC: Emissions

	Standard	Test level	Criteria	Notes & Conditions
Conducted	EN55011	B		CISPR22-B, FCC PART15-B
Radiated	EN55011	B		With ferrite king core K5B RC 25x12x15-M on input
Harmonic current	EN61000-3-2	Class D		
Voltage flicker	EN61000-3-3			


EMC: Immunity

	Standard	Test level	Criteria	Notes & Conditions
ESD	EN61000-4-2	4	A	15KV Air, 8KV Contact
Radiated	EN61000-4-3	3	A	10V/m 80MHz-2.7GHz sine wave 80% AM 1KHz
EFT	EN61000-4-4	3	A	2KV Power, 1KV I/O 5KHz (Ed4)
Surges	EN61000-4-5	Installation Class 3	A	1KV Live-Neutral, 2KV Live/Neutral—Earth
Conducted	EN61000-4-6	3	A	10V, 0.15 to 80MHz sine wave 80AM 1KHz
Magnetic Fields	EN61000-4-8	30A/m	A	50Hz
Voltage Dips and Interruptions	EN61000-4-11		B	

Safety Approvals



	Safety standard	Notes & Conditions
UL/CSA	ES 60601-1 2nd Ed., CSA 22.2 No 60601-1	E173812 Vol D1
CB	IEC60601-1 3rd Ed.	Test cert Class I 94798, Class II 94849
Nemko	EN60601-1	Nemko Class I P16221541, Class II P16221548
CE		2011/65/EU RoHS Directive and 2014/35/EU Low voltage directive
Equipment protection class		Class I (please contact sales for class II versions)

Mechanical Details

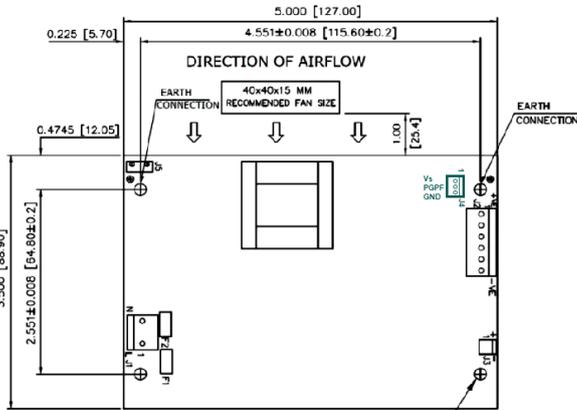

MECHANICAL OUTLINE DIMENSIONS
ALL DIMENSIONS ARE IN INCHES[MM]
GEN TOLERANCE : +/-0.04[+/-1.0MM]

Screw terminal version
(on request)


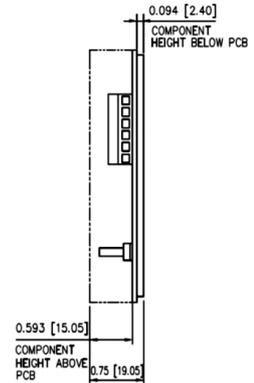
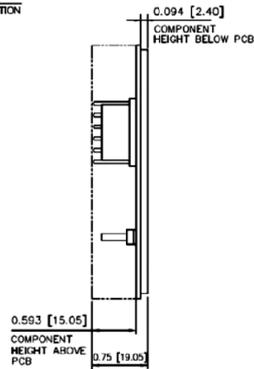


J1: Input Connector ⁽²⁾	
Pin Connections	
Pin	Function
1	AC Line
2	AC Neutral


J2: Output Connector ⁽³⁾	
Pin Connections	
Pin	Function
1	+Vout
2	+Vout
3	+Vout
4	-Vout
5	-Vout
6	-Vout

J3: Fan Connector ⁽⁴⁾	
Pin Connections	
Pin	Function
1	Fan +
2	Fan -

J4: PGPF Connector ⁽⁵⁾ (optional)	
Pin Connections	
Pin	Function
1	AC OK
2	PGPF
3	GND

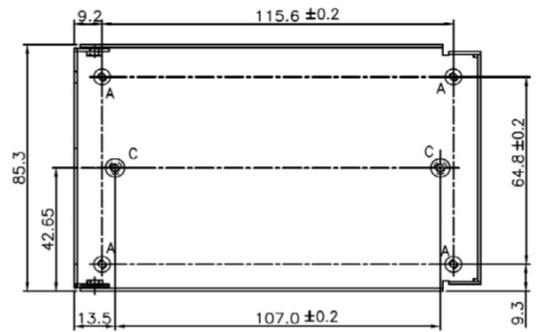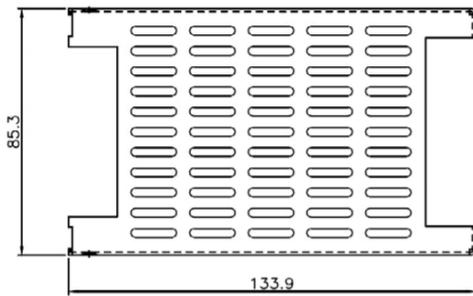

Screw	Description	Detail	Qty
A	PCB mounting	PNHD M3 6mm	4
B	Mates with D	PNHD M3 6mm	2
C	Case mount (screws not supplied)	M3 x 0.5 thread 3mm deep	2

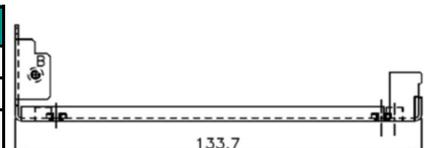


Notes

- All MULP275 shown in Inches [mm], ULP275CK mm
- J1: Input connector details: Molex: 26-60-4030 mating part: Molex: 09-50-3031 or equivalent
- J2: Output connector details: Molex: 26-60-4060 mating part Molex: 09-50-3061 or equivalent

- J3: Output connector details: AMP: 640456-2 mating part AMP: 640440-2 or equivalent
- J4: **Optional** PGPF output connector details: AMP: 640456-3 mating part AMP: 640440-3 or equivalent
- Case supplied with mylar insulator

Installation Advice

Safety

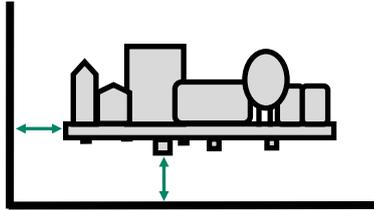

On installation customers must consider the required creepage and clearance distances between the PSU and the end-equipment enclosure. These distances vary depending on the installation class and safety standard requirements.


For **Class I** installations there should be 3-4mm between any part of the PSU and any earthed metal part of the enclosure. 3mm is acceptable for IT applications, 4mm required for medical applications. In Class I installations the PSU earth point must be connected to system safety ground.

For **Class II** installations distances may need to be increased if being installed into a surrounding metal enclosure.

Ensure consideration of components on the underside of the PCB or low lying spills when measuring clearance distances between the PSU and the end-equipment. Also top surface especially in tight enclosures such as 1U boxes. An insulation material can be used between PSU and metal if smaller gap required.

FiDUS recommends installing the PSU on 6mm stand offs typically, but check the distances.

EMC




Conducted and radiated emissions compliance is a common application consideration. It is important to remember that even when using a properly filtered PSU, an application may still not achieve compliance if it is not designed to minimise emissions. That being said, there are a number of things that can be done to optimise EMC performance either as best practice, or if you are struggling for compliance:

- 1) Connect all marked EMI ground points to earth. Often these are combined with the safety earth point (in class I installations), but on some power supplies there may be additional earth tags or mounting points.
- 2) Minimise the length of input/output wiring where possible and try to maintain max distance of the conductors from the PSU, to prevent noise pick up. Avoid bundling input and output cables together. A common component to avoid placing wiring near is the PFC inductor in power factor corrected power supplies.
- 3) Apply additional filtering before the PSU input (ensure consideration of which frequencies there are issues with before selecting a filter).
- 4) When using an open frame PSU, mount the supply on a metal plate and connect EMI mounting points.
- 5) In multi circuit systems, decouple the circuits locally.
- 6) Ferrites added between the PSU and system input connector and/or the DC output cables can help in reducing radiated noise issues in systems. If seen, issues are commonly in the 30-150MHz area.

For more detailed assistance, if you still have any concerns with compliance, please get in contact with our Engineering department who are on hand to assist with any queries.

Thermal

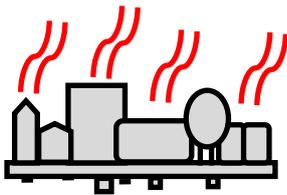


Thermal management is an important consideration when thinking about equipment service life. Electrolytic capacitors within the PSU wear with time and are typically the first end-of-life failure. Keeping the operation temperature of key components within the PSU, such as the electrolytic capacitors, as low as possible is paramount. As a general rule, for every 10°C drop in the operating temperature of the electrolytic capacitors you double their lifetime, and thus the lifetime of the power supply. When looking at thermal performance it is helpful to test under a worst-case set of conditions, to ensure component temperatures are in an acceptable range for the required service life. Then consider the impact of operational time, load and temperature profile to estimate a more realistic lifetime for your PSU.

Also, many FiDUS power supplies offer a *Peak Power* rating to provide for customers with pulsing loads. When using a peak power capability customers must consider:

- 1) Peak duration rating: the maximum length of time the peak can be drawn for
- 2) Duty cycle: the frequency with which the peak can be drawn. (e.g. 10% duty cycle, 1 second on:9 seconds off)
- 3) Average power value: datasheets will state the maximum average power acceptable with peak power PSUs. If any of these elements are exceeded the supply may overheat, with performance and lifetime suffering as a result.

Connectivity

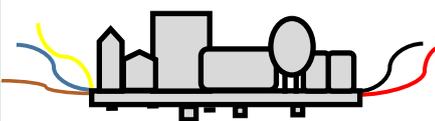

All FiDUS Power engineering samples requested will arrive with a free of charge loom kit for ease of testing.

The loom kit connects to the input/output terminals of the PSU and provides the customer with bare wire ends to connect with.

The loom kits can also prove advantageous for ease of installation in production. Please contact sales if you are interested in including the loom kit in your quotation.

Alternatively the input/output connector and mating part details can be found in the attached table.

	Part Number	Mating Part Number
Input	Molex: 26-60-4030	Molex: 09-50-3031
Output	Molex: 26-60-4060	Molex: 09-50-3061
Loom Kit	ULP275-LK	