# **▼**FidusPower

# LD40-23BxxR2 SERIES











PCB: 2.736 x 1.535 x 0.945" (69.5 x 39 x 24mm) A2S: 3.783 x 2.126 x 1.22" (96.1 x 54 x 31mm) A4S: 3.783 x 2.126 x 1.402" (96.1 x 54 x 35.6mm)



85 - 305 VAC

-40 TO 85°C **OPERATION** 

**4200 VAC ISOLATION** 



| LD40   | -23B          | 12  | R2      |
|--------|---------------|---|---------|
| Series | Input voltage | Output voltage  | Version |
|        | 85-305VAC     | 05 = 5VDC<br>12 = 12VDC<br>15 = 15VDC<br>24 = 24VDC<br>48 = 48VDC |         |

## **Key specifications**

| Input range | Safety certification                                      | Efficiency | Environmental performance |
|-------------|---|------------|---------------------------|
| 85-305VAC   | UL / EN 62368-1, Designed to<br>meet IEC / EN 60335-1, CE | 86-90%     | -40 to 85°C               |


# **→** FidusPower

## LD40-23BxxR2 SERIES




#### Through hole






| Pin | Function  |
|-----|-----------|
| 1   | AC IN (N) |
| 2   | AC IN (L) |
| 3   | -DC OUT   |
| 4   | +DC OUT   |




#### Notes

- 1. All dimensions shown in mm
- 2. Pin diameter ±0.1 [±0.004]
- 3. General tolerance ±0.5 [±0.02]

#### Chassis mount



#### DIN rail mount



| Pin | Function |
|-----|----------|
| 1   | NC       |
| 2   | AC(N)    |
| 3   | AC(L)    |
| 4   | +VO      |
| 5   | NC       |
| 6   | NC       |
| 7   | NC       |
| 8   | -VO      |

| Weight       |      |      |  |  |  |
|--------------|------|------|--|--|--|
| Through hole | A2S  | A4S  |  |  |  |
| 100g         | 147g | 190g |  |  |  |

# FidusPower

# LD40-23BxxR2 SERIES

### Models & Ratings

| Model Number (1) | Output Power | Output Voltage | Output current | Efficiency (2) | Max Capacitive Load |
|------------------|--------------|----------------|----------------|----------------|---------------------|
| LD40-23B05R2     | 35W          | 5V             | 7000mA         | 86%            | 6600uF              |
| LD40-23B12R2     | 40W          | 12V            | 3330mA         | 89%            | 4000uF              |
| LD40-23B15R2     | 40W          | 15V            | 2666mA         | 90%            | 3000uF              |
| LD40-23B24R2     | 40W          | 24V            | 1670mA         | 89%            | 1500uF              |
| LD40-23B48R2     | 40W          | 48V            | 833mA          | 90%            | 470uF               |

### **Input**

| Parameter           | Min                                 | Typical | Max  | Unit | Notes/Conditions  |  |
|---------------------|-------------------------------------|---------|------|------|---|--|
| Input voltage       | 85                                  |         | 305  | VAC  | 100-430 VDC slow blow fuse required.<br>See page 6 for derating curve |  |
| Input frequency     | 47                                  |         | 63   | Hz   |   |  |
| Power factor        |                                     |         |      |      | EN61000-3-2 class A   |  |
| Input current       | 0.6                                 |         | 1    | Arms | 1A 115VAC / 0.6A at 230VAC  |  |
| Inrush current      | 30                                  |         | 60   | А    | 30A at 115VAC and 60A at 230VAC. Cold start at 25°C                   |  |
| No load input power |                                     | 0.3     | 0.55 | W    |   |  |
| Leakage current     |                                     |         | 0.1  | mA   | 277VAC 50Hz   |  |
| Built in fuse       | Built in fuse 3.15A / 300V slowblow |         |      |      |   |  |

## Output

| Parameter          | Min | Typical | Max | Unit     | Notes/Conditions  |
|--------------------|-----|---------|-----|----------|---|
| Output voltage     | 5   |         | 48  | VDC      | See Models & Ratings table  |
| Set point accuracy |     | ±2      |     | %        |   |
| Line regulation    |     | ±0.5    |     | %        |   |
| Load regulation    |     | ±1      | ±2  | %        | 0 to 100% load  |
| Minimum load       | 0   |         |     | %        |   |
| Ripple and noise   |     | 100     | 150 | mV pk-pk | All models measured with 10uF and 0.1uf capacitor. 20 MHz bandwidth |
| Hold up time       | 8   |         | 50  | mS       | 8ms for 115VAC and 50ms for 230VAC                                  |

<sup>1.</sup> Typical efficiency at 230VAC 2. Unless stated, figures are at 25  $^{\circ}\text{C}$  <75RH and nominal line/ load.



## LD40-23BxxR2 SERIES

### Protections

| Parameter     | Min | Typical | Max                         | Unit | Notes/Conditions   |
|---------------|-----|---------|-----------------------------|------|--|
| Overload      | 130 |         |                             | %    | Trip and restart. Automatic recovery                         |
| Short circuit |     |         |                             |      | Trip and restart. Automatic recovery                         |
| Over voltage  |     |         | 6.3<br>16<br>25<br>35<br>60 | VDC  | 5V units<br>12V units<br>15V units<br>24V units<br>48V units |

### **Safety**

| Parameter                  | Min                        | Typical | Max | Unit | Notes/Conditions |
|----------------------------|----------------------------|---------|-----|------|------------------|
| Safety standards           | IEC/EN/UL62368-1/EN60335-1 |         |     |      |                  |
| Isolation: Input to output | 4200                       |         |     | VAC  |                  |

### **EMC:** Immunity

|                                | Standard     | Test level                                       | Criteria | Notes/Conditions                          |  |  |
|--------------------------------|--------------|--|----------|---|--|--|
| ESD                            | EN61000-4-2  | 3  | А        | ±6kV contact / ±8kV Air                   |  |  |
| Radiated                       | EN61000-4-3  | 3  | А        | 10V/m                                     |  |  |
| FFT                            | EN61000-4-4  | 3  | А        | ±2kV Circuit 1                            |  |  |
| EFT                            | EN61000-4-4  | 4  | Α        | ±4kV Circuit 2                            |  |  |
| Curana                         | EN61000-4-5  | Installation class 3                             | А        | ±2kV                                      |  |  |
| Surges                         | EN61000-4-5  | Installation class 3                             | А        | ±2kV Line-Line, 4kV Line-Ground Circuit 2 |  |  |
| Conducted                      | EN61000-4-6  | 2  | А        | 10Vrms                                    |  |  |
| Voltage dips and interruptions | EN61000-4-11 | 0% interruptions 70% dips performance criteria B |          |   |  |  |


#### **EMC:** Emissions

|                  | Standard    | Test level | Criteria | Notes/Conditions |
|------------------|-------------|------------|----------|------------------|
| Conducted        | EN55032     | В          |          |                  |
| Radiated         | EN55032     | В          |          |                  |
| Harmonic current | EN61000-3-2 | Class A    |          |                  |
| Voltage flicker  | EN61000-3-3 |            |          |                  |

# ♣ FidusPower

### LD40-23BxxR2 SERIES

## **Application Notes**

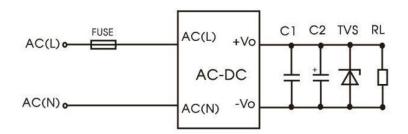

#### Typical Application: Circuit 1


- 1. For a typical application we recommend placing these additional components close to the converter 2. In circuit 1, C1 should be a ceramic cap for HF noise and C2 an electrolytic with low ESR
- 3. Both caps should have a minimum 20% voltage margin on the output voltage
- 4.The TVR is placed to protect the load should the converter fail

| Part no      | Fuse                    | C1      | C2        | TVS      |
|--------------|-------------------------|---------|-----------|----------|
| LD40-23B05R2 | 3.15A/300V<br>slow blow | 1uF/50V | 330uF/16V | SMBJ7.0A |
| LD40-23B12R2 |                         |         | 330uF/16V | SMBJ20A  |
| LD40-23B15R2 |                         |         | 220uF/25V | SMBJ20A  |
| LD40-23B24R2 |                         |         | 100uF/35V | SMBJ30A  |
| LD40-23B48R2 |                         |         | 47uF/63V  | SMBJ64A  |

#### **Suggested EMC: Circuit 2**

- 1. The neighbouring circuit 2 is recommended to pass EMC emission and immunity.
- 2. Place components as close to the converter as
- For better EMC performance fit MOV S14K350,
  15A/300V fuse, 1nF/4000V Y caps and 10mH LCM.

| Component | Recommended value    |  |  |
|-----------|----------------------|--|--|
| Fuse      | 3.15A/300V slow blow |  |  |
| MOV       | S14K350              |  |  |
| CY 1/2    | 1nF/400VAC           |  |  |
| LCM       | 10mH                 |  |  |

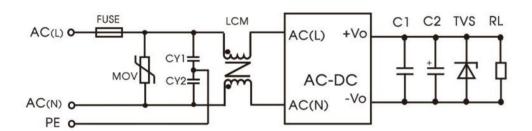



# ♣ FidusPower


# LD40-23BxxR2 SERIES


## **Environmental**


| Parameter               | Min  | Typical | Max   | Unit | Notes/Conditions               |
|-------------------------|------|---------|-------|------|--------------------------------|
| Operating temperature   | -40  |         | 85    | °C   | See derating curve             |
| Storage temperature     | -40  |         | 85    | °C   |                                |
| Altitude                | 2000 |         | 5000  | m    | Derate 6.6% every km above 2km |
| Temperature coefficient |      |         | ±0.02 | %/°C |                                |
| Storage Humidity        |      |         | 95    | % RH |                                |







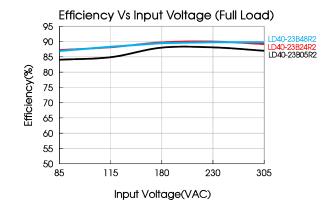

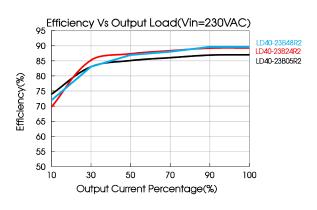

13th October 2023