



IDA200 SERIES



200W EXTERNAL

DIMENSIONS:



6.89 x 2.91 x 1.65"
(175.2 x 74 x 42mm)

COMPACT SIZE

C14 / C6 INLET

LEVEL VI

EN55032 LEVEL B

CONNECTOR
CUSTOMISATION

UP TO 88% EFFICIENT



Part numbers

IDA	200	12	-	C14
Series	Power (W)	Output voltage		Options
		12 = 12VDC 19 = 19VDC 24 = 24VDC 48 = 48VDC 56 = 56VDC		-C14 inlet -C6 inlet

Key specifications

Input range	Safety certification	Efficiency	Environmental performance
90-264VAC	UL/IEC/EN 62368-1	>88%	Operational: 20 to 60°C

Mechanical

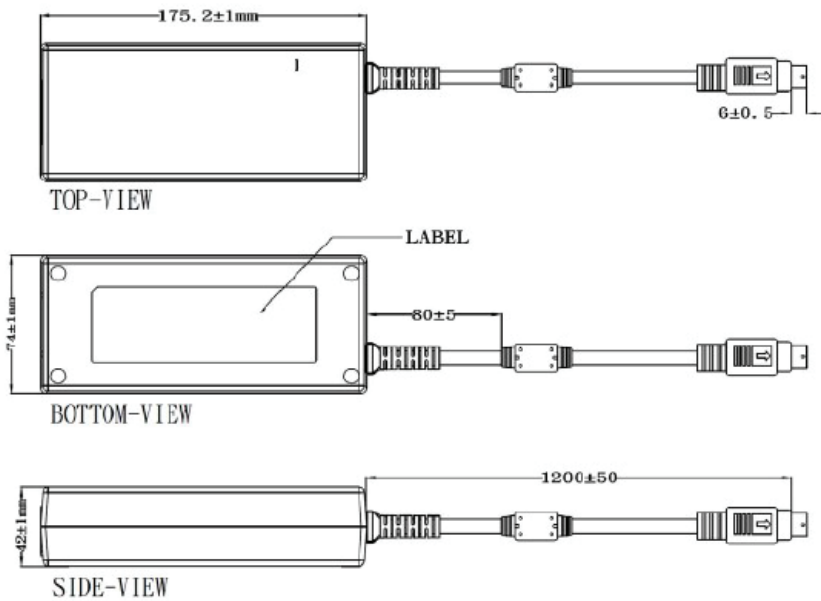

FRONT-VIEW

For UK/ US/ EU mains power cable please order UK-C14, US-C14 or EU-C14 separately

Notes

1. All dimensions in mm
2. Output connector : 4 pin moulded Kycon type connector.
3. Negative DC output is AC earth bonded. For floating negative DC output please contact sales.
4. UL2464 cable; 12V-19V AWG16 4C (1.2M), 24V AWG18 4C (1.5M), 48V-56V AWG18 2C (1.5M)

Weight

738g

IDA200 SERIES



Models & Ratings

Model Number ⁽¹⁾	Output Power	Output voltage	Output current
IDA20012-C14	192W	12V	16.00A
IDA20019-C14	200W	19V	10.50A
IDA20024-C14	200W	24V	8.30A
IDA20048-C14	200W	48V	4.17A
IDA20056-C14	200W	56V	3.58A

1. -C6 IEC inlet also available on request.
2. Alternative output connectors available for production quantities. Contact sales for details.
3. For UK/ US/ EU mains power cable please order UK-C14, US-C14 or EU-C14 separately.



Input

Parameter	Min	Typical	Max	Unit	Notes/Conditions
Input voltage	90		264	VAC	No derating
Input frequency	50		60	Hz	
Power factor					EN61000-3-2 class A compliant
Input current (rms)			2.4	A	
Inrush current			100	A	High line. Full load, 25°C cool start, Vin=230VAC
No load input power			0.21	W	230VAC



Output

Parameter	Min	Typical	Max	Unit	Notes/Conditions
Output voltage	12		56	VDC	±5% accuracy
Total regulation		±5%		%	
Minimum load	0			%	
Transient response		0.5		mS	50% load change
Ripple & noise			1	%Pk-Pk	All models measured with 10uF and 0.1uf capacitor. 20 MHz bandwidth
Hold up time	10			mS	At full load

Protections

Parameter	Min	Typical	Max	Unit	Notes/Conditions
Overload			180	%	Automatic recovery
Short circuit					Automatic recovery
Over voltage protection			150	%	Latch off reset

Safety

Parameter	Min	Typical	Max	Unit	Notes/Conditions
Safety standards	UL/IEC/EN 62368-1				
Isolation	Input to Output: 3000, Input to Ground: 1770			VAC	For 1 minute
Insulation resistance		10		MOhm	500Vdc input to output and output to ground
Power density			6.05	W/In3	

EMC: Emissions

	Standard	Test level	Criteria	Notes/Conditions
Conducted	EN55032	B		
Radiated	EN55032	B		
Harmonic current	EN61000-3-2	Class A		
Voltage flicker	EN61000-3-3			

EMC: Immunity

	Standard	Test level	Criteria	Notes/Conditions
ESD	EN61000-4-2	2, 3	A	Contact: 4KV, Air: 8kV
Radiated	EN61000-4-3	2	A	3V/m
EFT	EN61000-4-4	2	A	±1kV
Surges	EN61000-4-5	Installation class 3	A	Line to Neutral 1kV, Line/Neutral to PE 2kV
Conducted	EN61000-4-6	2	A	3Vrms
PFMF	EN61000-4-8	1	A	1A/m
Dips and interruptions	EN61000-4-11	>95% interruption 250 periods, >95% dip 0.5 periods, 30% dip 25 periods. Perf criteria: B,A,A		

Environmental

Parameter	Min	Typical	Max	Unit	Notes/Conditions
Operating temperature	-20		60	°C	See derating curve below
Storage temperature	-20		80	°C	
Cooling					Convection cooled
Operating humidity	20		80	% RH	
Storage humidity	10		90	% RH	
MTBF	300			kHrs	As per Telcordia SR-332

Derating curve

